




## TYL<sup>®</sup> - NAS 200

Flame Retardant Noise Absorbing Sponge

202402

### DESCRIPTION

TYL<sup>®</sup>-NAS200 made of flame retardant density sponge, has egg-crate like appearance and favorable acoustic characteristics.

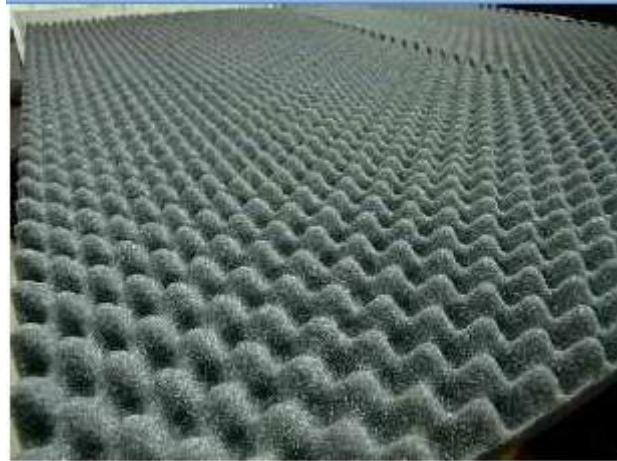

### USES

- Studio, Piano room, Drum room, Anchor's room,
- Home Theater, KTV, Meeting rooms, Instrument rooms

### SPECIFICATION COMPLIANCE

- TB117-2013 R2019

### PROPERTIES

<u>Thickness</u>	<u>Reduce Sound Level</u>
25mm	Min 20 dB (100Hz to 3150 Hz)
50mm	Min 25 dB (100Hz to 3150 Hz)

### PACKAGING

Sheet thickness : 25mm , 50mm

Sheet size : 1M x 2M.

\*Special dimension is an available upon request

### ADVANTAGES

- Feather light and non-absorbent
- Voltage resistant
- Reduce noise and sound transmitting
- Reduce interior reflected sound disturbance.
- Reduce interior reflected sound disturbance.
- Suitable for sound recording studio, listening room, home theater, KTV, and all kinds of public places.
- The sponge is the ideal sound insulation, sound-absorbing, heat insulation material
- Sound-absorbing sponge is on the basis of sponge for further processing, acoustic inside the sponge and reflection of the increase in the number so as to achieve the noise, sound-absorbing effect.