




# COTSWOLD<sup>®</sup> 英國 確士威

## 環保蟻油

GOOD FOR WOOD  
ECO SHED & FENCE PRESERVER

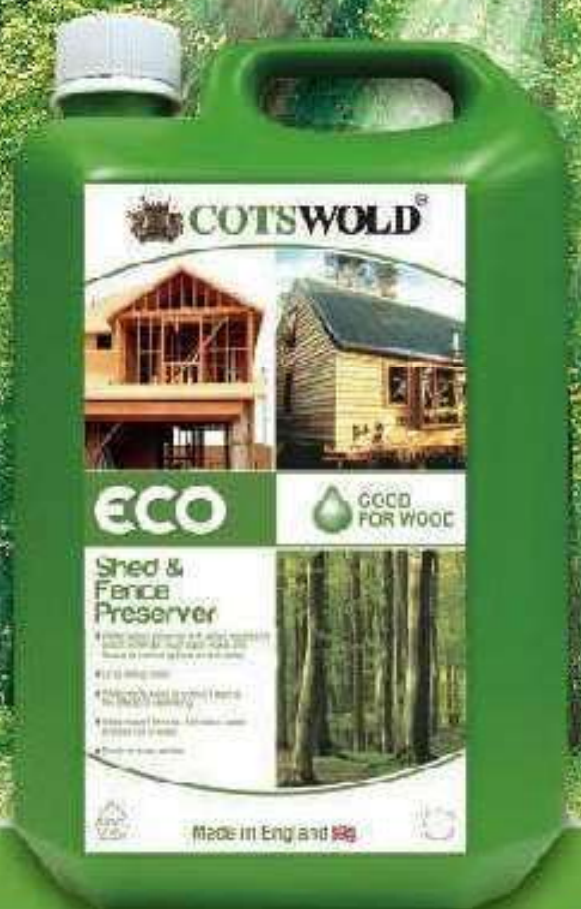


達言(香港)有限公司

*TAT YIN (HK) CO., LTD.*

香港灣仔軒尼詩道 288 號英皇集團中心 15 樓 1504 室  
Rm 1504, 15/F, Emperor Group Centre, No.288 Hennessy Road, Wanchai, HK

☎ (852) 2121 4694 (4 Lines)    🌐 www.tatynltd.com

Made in England 



# 確士威環保蟻油

## 說明

確士威環保蟻油是一種滲透性強、適用於保護粗滑表面木料上的水性微乳液防腐劑。確士威環保蟻油供應多種傳統木器顏色，能有效地為木料覆蓋上一層極優質的防菌和防木蛀蟲的保護膜。產品符合英國國家的標準 BS 8417 (木材防腐劑的選擇、採用和使用指引)，並已通過英國健康安全部批准證明。

## 方便用戶使用

確士威環保蟻油具有極微危害性，詳細資料如下：

- (一) 在室內環境內使用，一小時後可返回單位內。
- (二) 真正的水性塗料：不含有芳香劑，碳氫化合物和乙二醇酯溶劑。
- (三) 無臭無味，非易燃品。
- (四) 滲透性強而快的活性成分，使乾燥時間短，並能迅速且深入地滲透木料內部結構起修護木料的作用。

## 環保

- (一) VOC含量極低，僅 27 克/升
- (二) 不含有毒的聚乙烯金屬 (已通過歐洲 BSEN 1122B: 2001 國際標準和美國 EPA 檢測)，不含重金屬及任何對環境造成危害的有毒物質，並可安全地循環使用。

## 功效顯著

確士威環保蟻油是一種水性的可替代傳統溶劑性防腐劑滲入木料，防止木料腐爛、腐蝕性及阻止幼蟲的生長以及其它木蛀蟲的形成。同時，它能夠為表面留下一層防水且防止惡劣天氣破壞的保護膜，以達到長期保護木料的效果。

## 應用範圍

確士威環保蟻油適用於木料表面，如棚屋和柵欄，副架，鏡背面板，裝飾夾板和水泥模板等等。同時也適用於原木或已上過類似顏色塗料的木器上。本產品可以刷塗，也可以使用噴霧器來噴塗。





# COTSWOLD

## ECO SHED & FENCE PRESERVER

### Introduction

Cotswold Eco Shed & Fence Preserver is a penetrating, Water Based micro emulsion Preserver for the waterproofing and preservation of rough sawn timber. Cotswold Eco Shed & Fence Preserver is available in a range of traditional wood colours manufactured using quality pigments which helps user easily control to have an effective covering and to which provide excellent fungi and woodworm resistant. The product is complied to BS 8417 (Guidance on choice, use and application) And approved by Health and Safety Executive (HSE) in the United Kingdom.

### User friendly

Cotswold Eco Shed & Fence preserver has an extremely low hazard rating as details:

- Approved for 1 hour minimum re-entry period following treatment subject to physical barrier until surface dry.
- Truly water based ie. Contains No Aromatic/ Hydrocarbon/ Glycol Ester solvents
- Virtually odourless and non Flammable
- It affords rapid penetration of active ingredients and fast drying time, together with penetration and fixing deep into timber structure.

### Eco Friendly

It contains very low VOC, 27g/L. It contains in a non toxic poly-can ( tested to BSEN 1122B : 2001 and EPA test ) which leaving no heavy metal and toxic matter to the environment and is safely to be recycled .

### It works perfectly

Cotswold Eco Shed & Fence Preserver is a water based alternative to traditional solvent based preserver which penetrates wood to preserve it against rot, decay growing larva woodworm. It is, at the same time, leaving a waterproof coating that resists the harmful effects of weathering and provides long lasting preservation to timber.

### Field application

Cotswold Eco Shed & Fence Preserver is ideal for use on timber as sheds and fences ; sub-frame ; mirror backing board molding plywood board ,molding board... etc. It can be used on bare wood or wood which has been coated with a similar colour. It can be brush applied or spray applied by using the Sprayer.



### 顏色選擇 Color selection



深橡色 Dark Oak



透明 Clear

### 沒有蟻油的後果 You don't want this.....





# 使用說明 User manual

## 覆蓋率

罐士威環保蠟油在不同木面使用的覆蓋率如下：

木面類型	覆油次數	每公升覆蓋率
粗糙	兩次	4-6 平方米
砂光	兩次	5-9 平方米

## 使用前

使用環保蠟油前必需把表面的油漆、污垢及多餘的木屑用硬刷及砂紙清除。請確保木材乾爽，因環保蠟油不適用於潮濕的環境及木面下。產品可在 5°C 以上使用。

## 應用

先將環保蠟油徹底搖勻，然後扭開圓蓋倒出環保蠟油。請勿開稀環保蠟油，否則會影響顏色及防蟻的功效。

## 刷塗

- (一) 需搖勻後使用。
- (二) 需順著木紋刷塗。
- (三) 需要 2-3 小時，環保蠟油的表面才乾透。
- (四) 環保蠟油適用於任何表面切割及打磨後的木面。

## 噴塗

不要在大風或潮濕時使用噴塗。請用紙板保護不需要噴塗的地方，確保噴霧機能達到最佳噴塗功能。

## 注意

請不要把環保蠟油棄置或傾倒在下水道及水道旁。這樣會被噴自然生能。

## 認可證書 Certificate



## COVERAGE

Typical use of Coltswood Eco Shed & Fence Preserver is shown below :

Substrate Type	Treatment	Coverage
Rough sawn timber	2 coats by brush or spray application	4-6m <sup>2</sup> /per litre
For planned timbers	2 coats by brush or spray application	5-9m <sup>2</sup> /per litre

## PREPARATION

Ensure wood is clean and dry. Finishes such as paint, stain and varnish must be completely removed. For rough sawn wood, use a stiff brush to remove dirt, moss, fungal growth and lichens. Weathered wood should be sanded to remove loose wood fibres. For best possible results, use a good quality brush designed for use with water-based finishes. The colour table on the can has an indication of colour, the treatment of a test on a small area is recommended.

## APPLICATION

Shake thoroughly before and during use, do not dilute. Do not apply in wet conditions or if rain is likely before product dries. Do not apply in temperatures below 5°C.

## BRUSH APPLICATION

1. Shake well before and during use.
2. Apply even coats finishing in either direction of the grain.
3. Apply 2 or 3 coats as directed, allowing 2-3 hours between coats.
4. To ensure best protection, apply to all surfaces. Apply to any surfaces cut or abraded after treatment and pay particular attention to all end grain.

## SPRAY APPLICATION

The Sprayer has an accurate spray delivery, however, due to the nature of the product it is recommended that cardboard or plastic sheets are used to protect any areas from overspray. Do not spray in windy conditions or if rain is likely before product dries.

Shake the pack thoroughly before use. Pour the liquid into the tank of the Sprayer.

Do not empty into drains or watercourses. Some local authorities have special facilities for disposing of waste coatings. If using the Sprayer please refer to the clean up instruction in the Sprayer User Guide.